


Schedule 40 PVC Conduit Dimensions

Item No.	Size	OD		Min Average ID		Min T	
		Average		Schedule 40		Schedule 40	
		Inches	mm	Inches	mm	Inches	mm
HH-SCH40A	1/2	0.840±0.004	21.34±0.10	0.578	14.68	0.109	2.77
HH-SCH40B	3/4	1.050±0.004	26.67±0.10	0.780	19.81	0.113	2.87
HH-SCH40C	1	1.315±0.005	33.40±0.13	1.004	25.50	0.133	3.38
HH-SCH40D	1-1/4	1.660±0.005	42.16±0.13	1.335	33.90	0.140	3.56
HH-SCH40E	1-1/2	1.900±0.006	48.26±0.15	1.564	39.72	0.145	3.68
HH-SCH40F	2	2.375±0.006	60.32±0.15	2.021	51.33	0.154	3.91
HH-SCH40G	2-1/2	2.875±0.007	73.02±0.18	2.414	61.31	0.203	5.16
HH-SCH40H	3	3.500±0.008	88.90±0.20	3.008	76.40	0.216	5.49
HH-SCH40I	3-1/2	4.000±0.008	101.60±0.20	3.486	88.54	0.226	5.74
HH-SCH40J	4	4.500±0.009	114.30±0.23	3.961	100.60	0.237	6.02
HH-SCH40K	5	5.563±0.010	141.30±0.25	4.975	126.36	0.258	6.55
HH-SCH40L	6	6.625±0.011	168.28±0.28	5.986	152.04	0.280	7.11
HH-SCH40M	8	8.625±0.011	219.07±0.28	7.853	199.47	0.322	8.18

Dimensions are nominal

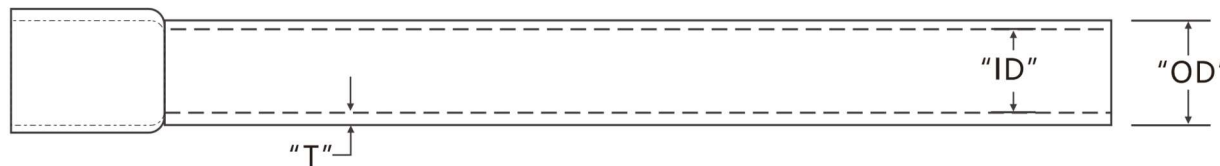

Schedule 40 Rigid PVC Conduit



Properties:

- ◆ PVC material test: ASTM D1784-20
- ◆ UL651 Standard.
- ◆ CSA C22.2 No.211. 2 Standard.
- ◆ Comply with NEMA TC-2.
- ◆ PVC material with great corrosion resistant.
- ◆ Impact resistant.
- ◆ Sunlight resistant.
- ◆ Self extinguishing, fire retardant.
- ◆ Smooth interior and outside.
- ◆ Suitable for underground or above ground applications.
- ◆ Standard lengths 10/20ft with a belled end or not. Other lengths can be customized for specific applications.
- ◆ FT4 rated.

LEDES[®]

Lead the safer electrical conduit systems

<https://www.ledestube.com/>