

Schedule 80 Rigid PVC Conduit



Properties:

- ◆ PVC material test: ASTM D1784-20
- ◆ UL651 Standard.
- ◆ Comply with NEMA TC-2.
- ◆ PVC material with great corrosion resistant.
- ◆ Impact resistant.
- ◆ Self extinguishing, fire retardant.
- ◆ Smooth interior and outside.
- ◆ Suitable for underground or above ground applications.
- ◆ Standard lengths 10/20ft with a belled end or not. Other lengths can be customized for specific applications.
- ◆ FT4 rated.

4




Lead the safer electrical conduit systems

Schedule 80 PVC Conduit Dimensions

Item No.	Size	OD		Min Average ID		Min T	
		Average		Schedule 80		Schedule 80	
		Inches	mm	Inches	mm	Inches	mm
HH-SCH80A	1/2	0.840±0.004	21.34±0.10	0.502	12.75	0.147	3.73
HH-SCH80B	3/4	1.050±0.004	26.67±0.10	0.698	17.72	0.154	3.91
HH-SCH80C	1	1.315±0.005	33.40±0.13	0.910	23.11	0.179	4.55
HH-SCH80D	1-1/4	1.660±0.005	42.16±0.13	1.227	31.16	0.191	4.85
HH-SCH80E	1-1/2	1.900±0.006	48.26±0.15	1.446	36.72	0.200	5.08
HH-SCH80F	2	2.375±0.006	60.32±0.15	1.881	47.77	0.218	5.54
HH-SCH80G	2-1/2	2.875±0.007	73.02±0.18	2.250	57.15	0.276	7.01
HH-SCH80H	3	3.500±0.008	88.90±0.20	2.820	71.62	0.300	7.62
HH-SCH80I	3-1/2	4.000±0.008	101.60±0.20	3.280	83.31	0.318	8.08
HH-SCH80J	4	4.500±0.009	114.30±0.23	3.737	94.91	0.337	8.56
HH-SCH80K	5	5.563±0.010	141.30±0.25	4.713	119.71	0.375	9.53
HH-SCH80L	6	6.625±0.011	168.28±0.28	5.646	143.41	0.432	10.97
HH-SCH80M	8	8.625±0.011	219.07±0.28	7.513	190.83	0.500	12.70

Dimensions are nominal

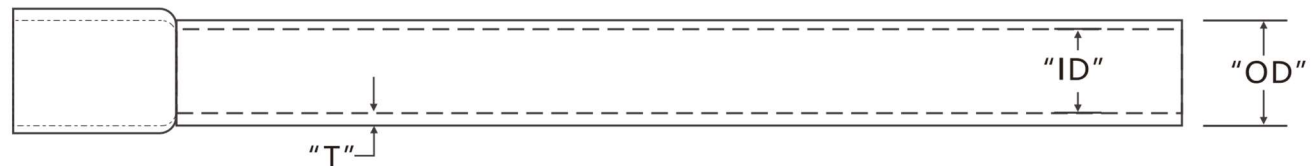

<https://www.ledestube.com/>